

1st International Conference on Sustainable Lighting and Light Pollution, **SLLP 2014**

Development of daylighting system with uniform illumination and its comparison

Irfan Ullah*

Department of Information and Communication Engineering, Myongji University, Yongin 449-728, South Korea

Abstract

Recently, it is found that more consideration has been given to the interaction between energy, buildings, and the environment. As buildings are the main source of energy use and greenhouse gas emissions, daylighting serves for both to improve indoor environment as well as to save energy utilization in buildings. Fiber-based daylighting systems have been shown to be a promising and effective way to transmit sunlight in the interior space. To increase efficiency, the current need is to illuminate optical fibers with uniform light flux so that uniform light can be delivered in the interior of the building. We propose a method for achieving uniform illumination over the fiber-bundle and distributing uniform light in the interior. Light is collected through a concentrator and focused toward a collimating lens, which distributes the light over the fiber-bundle. An optics diffusing structure, which includes a combination of lenses to achieve high average illuminance and illuminance uniformity, is utilized to spread the light in the interior. The results clearly reveal that the efficiency in terms of uniform illumination, which also reduces the heat problem for optical fibers, is improved. Furthermore, a comparison study is conducted between current and previous approaches. Finally, the proposed daylighting system turns out convenient in terms of energy saving and reduction in greenhouse gas emissions.

© 2014 The Authors. Published by SLLP 2014.

Keywords: daylighting; uniform illumination; parabolic reflector; solar concentration

1. Introduction

People living in urban areas spend most of their daylight hours under artificial light, and it has been researched that individuals are susceptible to detrimental effects in the absence of daylight [1]. Conventional incandescent and fluorescent lamps have been indicated in aggravating depression, aggression, eye strain, reduced muscle strength, obesity, and diabetes [1]. Consequently, daylight should be diffused in the interior for healthy indoor environment.

Daylighting has a significant role in the field of renewable energy in terms of reducing the use of electricity, which has been significantly increasing in many countries [2]. A reduction in energy consumption and the production of energy through renewable energy sources can lead to a lower production of greenhouse gas emissions, which is becoming an increasingly serious global issue [2]. Buildings, especially office buildings, are the main source of power consumption and greenhouse gas emission, and electricity demand is growing by 0.7% per year in buildings in the U.S.A. [2]. It has been estimated that energy consumption in residential and commercial buildings is nearly 40.40% of the total energy consumed in the U.S.A. [3]. Therefore, more attention has been paid to energy consumption in buildings, where lighting is the major source of energy utilization. Energy consumption due to electric lighting in buildings is approximately 40–50% of the total energy cost [4]. One of the reasons is that the growth of lighting demand is increasing due to rising average illuminance levels in buildings, especially in newly constructed buildings. Therefore, sustainable buildings have been developed. One of the principles of sustainable buildings is to illuminate the building by daylight instead of artificial light at all times of the day to reduce the overall energy consumption of the building. Efficient

* Corresponding author. Tel.: +82-(0)10-2747-7520
E-mail address: irfan@solarlits.com

daylight buildings are estimated to reduce electric lighting energy consumption by 50–80% [5]. Thus, an appropriate daylighting strategy will lead us to a solution to the energy problem.

In sustainable development, the interior of buildings is illuminated by daylight through the windows and the daylighting systems. During the architectural design process, an important consideration is given to daylight accessing the interior of buildings through the windows and the openings. Since buildings usually have windows, light from the windows decreases very rapidly, and interior areas may not have sun exposure. As a result, the illumination is not consistent and some areas may remain dark. According to European Standard, the requirement for the office buildings is to achieve an average illuminance of 500 lx [6]. However, it is difficult to achieve 500 lx at all times of the day through only windows and openings. Therefore, a daylighting system is needed to illuminate all the dark areas of the building during the day with electric lighting controls to reduce power consumption.

Several concepts regarding daylighting systems have been demonstrated with light pipes [7-11] and optical fibers [12-26], and most of the designs have a large number of tracking reflectors and lenses, and, thus, require a large area in which to be installed.

We analyzed losses and improved two fiber-optic daylighting systems using a parabolic reflector and Fresnel lens through simulation and real experiments [12]. During the development, the efficiency of the system was improved via uniform and collimated illumination on the fiber bundle and by reducing the heat problem, which had critical importance for the plastic optical fiber (POF) to make the system cost effective.

The main purpose of this study is to achieve uniform light into the optical fibers and to deliver it to building interiors. Consequently, we propose a novel approach for the parabolic reflector. Sunlight is concentrated and focused toward the collimating lens, and then collimated light is transmitted into optical fibers. To make the system cost effective, POFs are used for most of the transmission.

There has been a trend toward reducing the power consumption of electric lighting via new technologies. The possible ways to do this include the use of lighting control systems, the use of light sources with high luminous efficacy, and the utilization of daylight. High-performance light-emitting diodes (LEDs), compact fluorescent lamps, and incandescent lamps are used to replace low-efficacy light sources. To maintain the required illumination level at all times, the system must be able to compensate for when daylight is not available; thus, LED light sources are used due to their high efficacy. Furthermore, a hybrid system gives better illumination quality. This research also improves the efficiency of the hybrid, optical fiber-based daylighting system.

In this research, we present a simulation study of the proposed approach. LightTools®, which is a well-known, optical-simulation tool [12,13], is used to design the optical and mechanical components of the daylighting system, analyze the efficiency of the system, which includes light losses due to mechanical and optical components and illumination uniformity, and estimate the illuminance levels in the interior. Almost all losses (i.e. due to reflection and the transmittance of materials) are considered in the simulation to analyze the performance of the system efficiently. SolidWorks™ is used to design some mechanical parts. DIALux™, which is widely used for indoor and outdoor lighting simulation [27], is used to show the room's interior view under lighting simulation.

2. Background

To date, most studies have been dedicated to active daylighting systems, which include sun tracking module. Because these systems have high efficiency, they are preferred to install. Most of the daylighting systems have issue of non-uniformity. In this section, we will discuss non-uniformity issue in previous approaches [24-26]. We used our own measurements for illustrating non-uniformity.

The idea of capturing high-intensity sunlight has been demonstrated in which a parabolic reflector concentrated sunlight into a single optical fiber through a flat mirror [24], as shown in Fig. 1(a). For light transmission, fused-silica optical fibers were utilized. The optical fiber had a diameter of 1 mm, and the parabolic dish had a diameter of 0.2 m. After reflection of the light at the parabolic surface, most of the light was lost through it hitting the outer surface of the optical fiber. As a result, most of the light was not able to reach the flat reflector. They used small parabolic dishes to collect sunlight. However, the large number of parabolic dishes occupied a large area. Each parabolic dish needed a separate sun-tracking module, which increased the cost of the system. The system was used for solar thermal applications to produce energy rather

than daylighting. For daylighting, a system should contain a minimum number of concentrators. Therefore, this approach is not suitable for installing the concentrators on the roofs of buildings. If a fiber bundle is used instead of a single optical fiber with this approach, uniform illumination will not be obtained, even with a very high concentration of light.

In [25], they used parabolic and hyperbola reflectors for light capturing. The light was concentrated through a parabolic reflector and then light is reflected toward the hyperbola reflector. The light is inserted into optical fibers to transmit it into the interior. In this approach, we found two problems: the heat problem and non-uniformity. The central optical fibers in the bundle were over shadowed due to the blockage of direct sunlight from the hyperbola reflector, and some optical fibers had high intensity of light, as shown in Fig. 1(b). Thus, the bundle of optical fiber was illuminated non-uniformly.

In the Himawari solar lighting system, Fresnel lens was used to collect sunlight [26]. The light was focused through a Fresnel lens, and only visible light was inserted into optical fibers, as shown in Fig. 1(c). It had two series of models with a different number of lenses and optical fibers in the bundle. All models contained quartz-glass optical fibers (QOFs), which exhibited low losses during light transmission. However, the system was costly due to the price of QOFs. The system combined six optical fibers in each bundle for light distribution, and the illumination angle from the fiber bundle was 58 degrees. The luminous flux per cable was 1920 lm. Overall, the light capturing and distribution method was not well defined in this design in terms of it achieving uniform illumination.

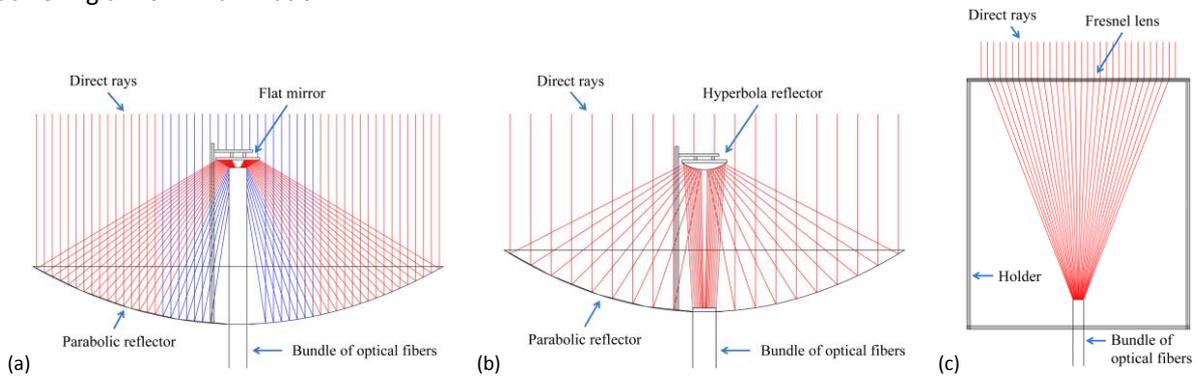


Fig. 1. Design of the system for the (a) parabolic and flat reflectors (b) parabolic and hyperbola reflectors (c) Fresnel lens.

3. System description

A parabolic reflector is used to achieve a high concentration of sunlight. In Fig. 2, sunlight collecting unit using the parabolic reflector and collimating lens is shown. Direct sunlight hits the surface of the reflector and reflected toward a collimating lens to create uniform light. After being collimated, the light is entered into optical fibers. Uniform illumination was accomplished through the collimating lens by

$$D_p = D_r \tag{1}$$

where D_p is the diameter of the concave region of the plano-concave lens and D_r is the diameter of the receiver (bundle of optical fibers). The focal length of the collimating lens was calculated by [28]

$$NA = n \cdot \sin\theta_{1/2} = \frac{D}{2f} \tag{2}$$

where NA is the numerical aperture of the concentrator and D is the diameter of the collimating lens. Measurements of reflectors, lenses, and other parameters are shown in Table 1.

Table 1. Measurements of different parameters for the daylighting system.

Title	Value (mm)
Diameter of parabolic reflector	320
Focal length of parabolic reflector	276
Depth of parabolic reflector	23.2

Diameter of plano-concave lens	18
Focal length of plano-concave lens	18.7
Diameter of the bundle of optical fibers	14.4
Distance between reflector and lens	261

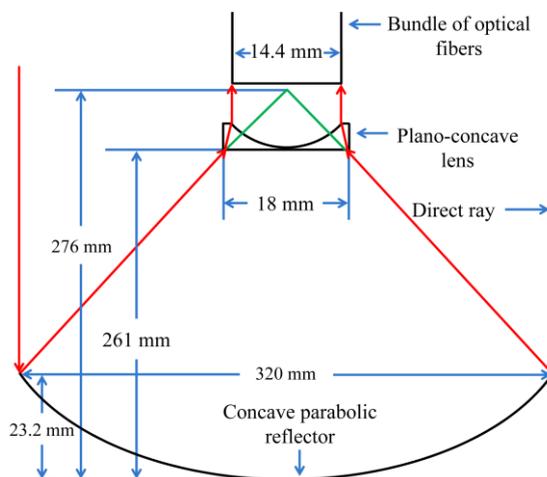


Fig. 2. Component layout and measurements of different parameters to generate uniform illumination for the parabolic reflector.

4. Daylight transmission and distribution

We used silica optical fibers to reduce heat problem, and POFs were used for most of the transmission part due to their low cost, flexibility, strength, and acceptability for complex wiring in buildings. POFs have a core diameter of 1.98 mm and a cladding diameter of 2 mm.

Recently, numerous approaches have been presented to achieve uniform illumination from light sources [29]. In solid-state lighting, this issue has gained critical importance. Similarly, uniform illumination is mandatory in daylighting. To spread the light from the optical fibers, which had a high beam of light, they were divided into different bundles, and optical fibers in each bundle were organized into a circular shape. Each fiber bundle covered a surface area of 78.54 mm². A diverging lens was the best choice for the light distribution. The focal length of the thin lens can be determined by the lens maker's formula, which can be written as [30]

$$\frac{1}{f} = (n - 1) \left(\frac{1}{r_1} - \frac{1}{r_2} \right) \quad (3)$$

where r_1 and r_2 are the two radii and n is the refractive index of the material. The lenses had a refractive index of 1.459. In [12], we used a biconcave lens at the end side of the fiber bundle to diverge the light. In present study, we used a combination of a biconcave lens and a concavo convex lens, as illustrated in Fig. 3. Radius and focal length of biconcave lens are 12 and 13.2 mm, respectively. Focal length of concavo convex lens was 11.3 mm. The radius-1 and radius-2 of concavo convex lens was 12 and 3.6 mm, respectively.

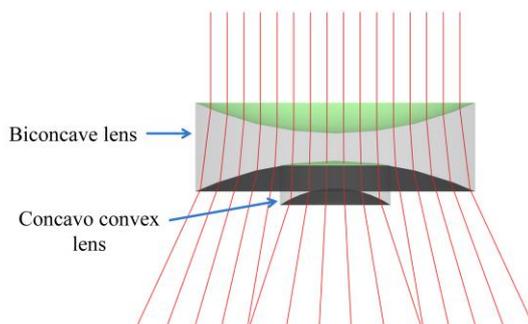


Fig. 3. Diffuser structure with ray-tracing.

5. Simulation and results

We simulated the proposed approach using optical software (LightTools®) to prove that the daylighting system can offer required illumination. For daylight, lumens was calculated to simulate the entire optical design for indoor by [31]

$$E' = \frac{dF}{dS} \tag{4}$$

where E' is the measured illuminance, dF is the input luminous flux in lumens, and dS is the area of the concentrator. We calculated the simulated input flux from the measured illuminance by using Eq. (4). The measured illuminance at different times of the day at outdoor and the calculated flux are mentioned in Table 2. To check illuminance uniformity on the fibers' ends, 500 K rays were used. In Fig. 4, we show simulation results that were achieved from different designs. The light on each optical fiber is not uniform, as shown in Figs. 4(a) and 4(b). In Fig. 4(c), the illuminance value is less than our proposed design. As evident from Fig. 4(d), uniform illumination was achieved in the bundle of optical fibers through the proposed approaches, and each optical fiber had similar illuminance. We have reduced shadow on the fiber bundle, as compared to the previous approach for the parabolic reflector [12].

Table 2. Average illuminance at different times of the day and the calculated flux for the concentrator.

Time	Outdoor illuminance (lx)	Input flux (lm)	Indoor illuminance (lx)
12 PM	110000	11255	756
1 PM	105000	10745	722
2 PM	100000	10240	688
3 PM	80000	8186	550
4 PM	60000	6140	413
5 PM	40000	4093	275
6 PM	20000	2047	138

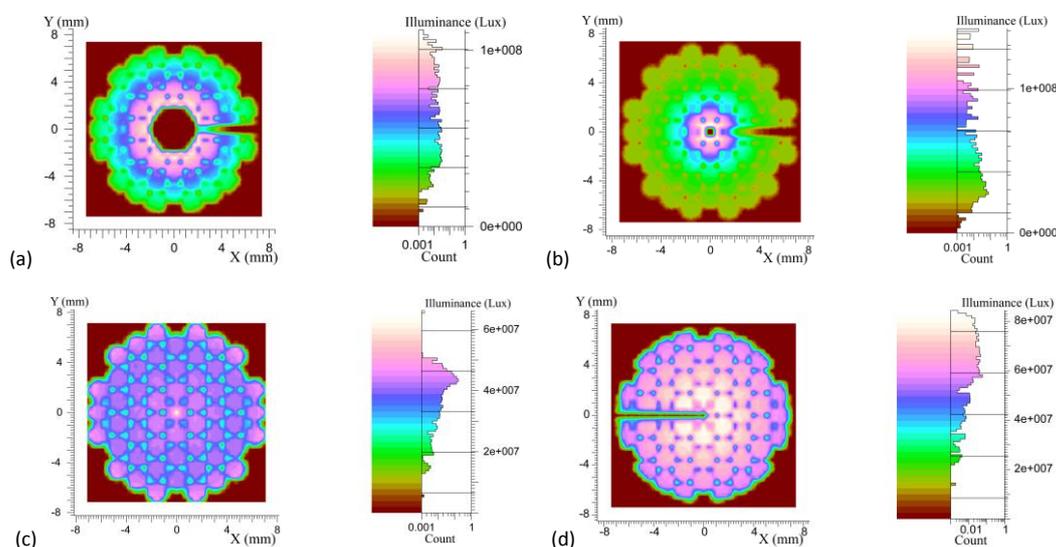


Fig. 4. Uniform illumination on the surface of optical fibers' ends for the (a) parabolic and flat reflectors (b) parabolic and hyperbola reflectors (c) Fresnel lens, and (d) proposed approach.

We mounted two systems to illuminate an area of 24 m². To distribute daylight in the interior, fibers were arranged into six bundles, and then placed at different positions to illuminate the interior. Each fiber bundle had fifty five optical fibers. Our main goal was to illuminate a large area with an average illuminance of more than 500 lx. To use small lenses for the distribution of light, optical fibers in each bundle were organized to form a circular shape. The candle power distribution curve of fiber bundle is shown in Fig. 5. Illuminance

distribution in the interior and on the working plane is shown in Figs. 6 and 7, respectively. The illuminance uniformity of a given space (plane) is calculated by

$$Uniformity = \frac{E_{min}}{E_{avg}} \quad (5)$$

where E_{min} is the minimum level (value) of illuminance and E_{avg} is the average level (value) of illuminance. We achieved illuminance uniformity of 0.3 and 0.7 on the work plane and floor, respectively.

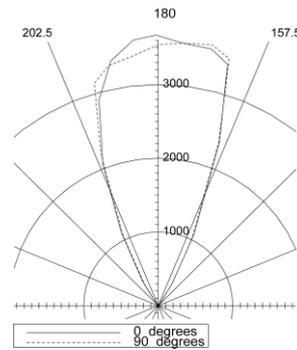


Fig. 5. The candle-power distribution curve of the fiber bundle.

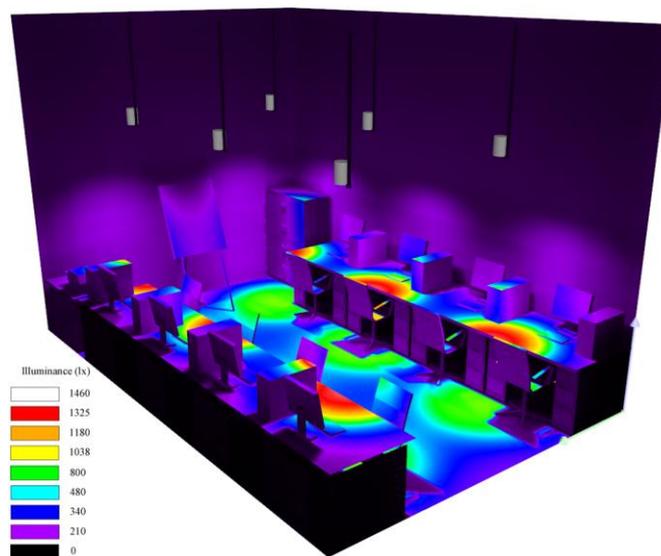


Fig. 6. Illuminance distribution in the interior.

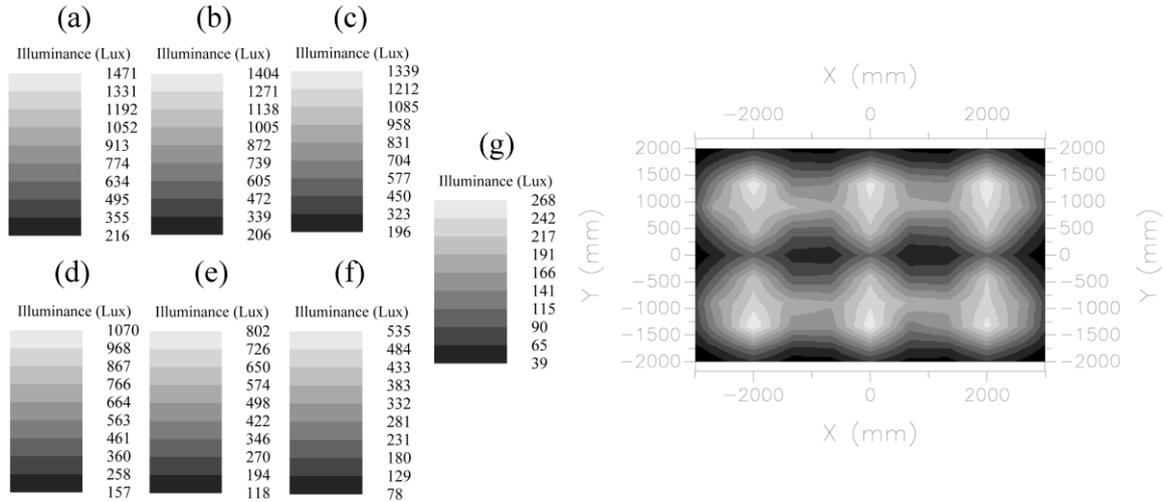


Fig. 7. Illuminance distribution on the working plane by daylight at (a) 12 PM, (b) 1 PM, (c) 2 PM, (d) 3 PM, (e) 4 PM, (f) 5 PM, and (g) 6 PM.

To attain the required illuminance of 500 lx, which is the minimum requirement [32], in the office when sunlight fell from the required range, we made use of LED sources. The LEDs were placed by feedback from a light sensor. When the daylight was strong, the LEDs were turned off. When illuminance of the daylight was insufficient, LEDs were turned on automatically to meet the deficiency. OSRAM™ LW W5AM LEDs were used, which have the maximum optical efficiency of 130 lm/W [33]. As shown in Fig. 8, 24 LEDs were arranged to make a single source of light, which illuminated an area of 4 m². Six LED light sources were arranged to illuminate an area of 24 m². We used 100 K rays from each LED to carry out the simulation. An average illuminance of 550 lx was achieved from the LEDs, as shown in Fig. 9.

Since a control unit was installed to maintain an average illuminance of 500 lx in the interior, a constant illuminance was provided at all times [11]. For example, when the average illuminance was 300 lx around 5pm, the remaining illuminance of 200 lx was provided by LEDs through the control unit.

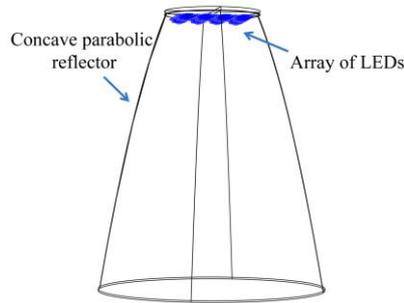


Fig. 8. LED light source with parabolic reflector, which produce uniform illumination on the working plane.

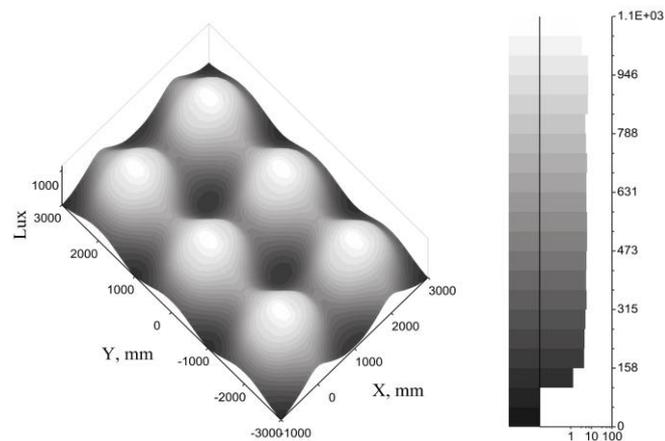


Fig. 9. LEDs' Illuminance distribution on the working plane.

6. Conclusions

The proposed daylighting system includes light capturing, transmitting, and distributing parts. To capture sunlight, we designed collecting module using parabolic reflector, and a collimating lens was used to achieve uniform illumination. We achieved better efficiency in terms of illuminance uniformity and light flux than that of previous approaches. For light transmission, we used plastic optical fibers to make the system cost-effective. To distribute daylight in the interior, an optical lens structure was used. As a result, we achieved uniform illumination on the working plane. Furthermore, we introduced a hybrid system by using LEDs.

To investigate the system, we considered an office building. The system was developed and applied to the office room. Results have shown that the interior of the room was illuminated uniformly with an average illuminance of more than 500 lx. Finally, daylighting will help in reducing electric lighting power consumption and improving indoor environments. In the future, we will improve light uniformity in the interior by designing an efficient diffuser.

References

- [1] F. M. Marks, Letter to the Editors: Lighting for Different Healthcare Settings, *Health Environments Research & Design Journal*, vol. 6, no. 3, pp. 166-168, 2013.
- [2] Annual Energy Outlook 2012, U.S. Energy Information Administration (EIA), USA, 2012.
- [3] 2010 Buildings Energy Data Book, U.S. Department of Energy, USA, 2010.
- [4] A. Ossa, D. A. Gottfried, T. Walsh, and L. N. Simon, *Sustainable Building Technical Manual: Green Building, Design, Construction and Operations*, US: Public Technology Inc., 1996.
- [5] *Green Building Rating Systems-Draft Recommendations for a U.S. Rating System*, U.S. Green Building Council, Bethesda, Md., 1995.
- [6] *CIBSE Code for Interior Lighting*, 1994.
- [7] I. Ullah and S. Shin, Heliostat based daylighting system for multi-floor office buildings, *The 19th Conference on Optoelectronics and Optical Communications (COOC)*, pp. 85-86, Gangneung, South Korea, May 2012.
- [8] I. Ullah and S. Shin, Concept of Solar Tower for Daylighting in Multi-floor Buildings, *Journal of Green Science and Technology*, 2013.
- [9] S. J. Oh, W. Chun, S. B. Riffat, Y. I. Jeon, S. Dutton, H. J. Han, C. Tsuei, and W. Sun, C. Kuo, Computational analysis on the enhancement of daylight penetration into dimly lit spaces: light tube vs. fiber optic dish concentrator, *Building and Environment*, vol. 59, pp. 261-274, 2012.
- [10] A. Laouadia and B. Coffey, The energy performance of the Central Sunlighting System, *Journal of Building Performance Simulation*, vol. 5, no. 4, pp. 234-247, 2012.
- [11] S. Görgülü and N. Ekren, Energy saving in lighting system with fuzzy logic controller which uses light-pipe and dimmable ballast, *Energy and Buildings*, vol. 61, pp. 172-176, 2013.
- [12] I. Ullah and S. Shin, Development of Optical Fiber-Based Daylighting System with Uniform Illumination, *Journal of the Optical Society of Korea*, vol. 16, no. 3, pp. 247-255, 2012.
- [13] I. Ullah and S. Shin, Uniformly Illuminated Efficient Daylighting System, *Smart Grid and Renewable Energy*, vol. 4, no. 2, pp. 161-166, 2013.
- [14] I. Wong and H. Yang, Cost study on remote source solar lighting system in high-rise residential buildings in Hong Kong, *Building and Environment*, vol. 67, pp. 231-239, 2013.

- [15] H. J. Han, S. B. Riffat, S. H. Lim and S. J. Oh, Fiber optic solar lighting: Functional competitiveness and potential, *Solar Energy*, vol. 94, pp. 86-101, 2013.
- [16] D. Lingfors and T. Volotinen, Illumination performance and energy saving of a solar fiber optic lighting system, *Opt. Express*, vol. 21, pp. A642-A655, 2013.
- [17] R. Núñez, I. Antón, and Gabriel Sala, Hybrid lighting-CPV, a new efficient concept mixing illumination with CPV, *Opt. Express*, vol. 21, pp. 4864-4874, 2013.
- [18] J. Song, Y. Yang, Y. Zhu, and Z. Jin, A high precision tracking system based on a hybrid strategy designed for concentrated sunlight transmission via fibers, *Renewable Energy*, vol. 57, pp. 12-19, 2013.
- [19] I. Ullah, Daylight for Healthy Indoor Environment and Energy Benefits, *International Journal of Ophthalmology & Eye Science*, vol. 2, no. 1, 2014.
- [20] I. Ullah and S. Shin, Development of optical fiber-based daylighting system with collimated illumination, 2012 17th Opto-Electronics and Communications Conference (OECC), pp. 596-597, Busan, South Korea, 2-6 July 2012.
- [21] I. Ullah, Q. Ullah, and S. Shin, Energy-efficient Daylighting Systems for Multi-story Buildings, *International Conference on Modeling and Simulation (ICOMS)*, Islamabad, Pakistan, Nov 25-27, 2013.
- [22] I. Ullah and S. Shin, Uniformly Illuminated Efficient Daylighting System, 2012 Asia-Pacific Power and Energy Engineering Conference (APPEEC), pp. 1-4, Shanghai, China, March 27-29, 2012.
- [23] I. Ullah, S. Shin, Highly Concentrated Optical Fiber-Based Daylighting Systems for Multi-Floor Office Buildings, *Energy and Buildings*, vol. 72, pp. 246-261, 2014.
- [24] D. Feuermann, J. M. Gordon, M. Huleihil, Solar fiber-optic mini-dish concentrators: first experimental results and field experience, *Solar Energy*, vol. 72, pp. 459-472, 2002.
- [25] A. Kribus, O. Zik, J. Karni, Optical fibers and solar power generation, *Solar Energy*, vol. 68, pp. 405-416, 2000.
- [26] V. E. Gilmore, Sun flower over Tokyo, *Popular Science*, Bonnier Corporation, America, 1988.
- [27] C. E. Ochoa, M. B. C. Aries, and J. L. M. Hensen, State of the art in lighting simulation for building science: a literature review, *Journal of Building Performance Simulation*, vol. 5, pp. 209-233, 2012.
- [28] D. Malacara, *Optical Shop Testing*, John Wiley & Sons, New York, USA, 1992.
- [29] G. Wang, L. Wang, F. Li, and D. Kong, Design of optical element combining Fresnel lens with microlens array for uniform light-emitting diode lighting, *J. Opt. Soc. Am. A*, vol. 29, pp. 1877-1884, 2012.
- [30] F. A. Jenkins, H. E. White, "Fundamental of Optics, McGraw-Hill, New York, USA, 1957.
- [31] V. N. Mahajan, *Optical Imaging and Aberrations, Part 1: Ray Geometrical Optics*, SPIE press, Washington, USA, 1998.
- [32] EN 12464-1 Light and Lighting – Lighting of work places – Part 1: Indoor work places, European standard, 2002.
- [33] OSRAM™, LUW W5AM Datasheet, http://www.osram-os.com/Graphics/XPic6/00089171_0.pdf/LUW%20W5AM.pdf, (January 2014).